

Standard Features

- Color AutoTouch™ control screen interface: —10 inch screen, offers operator tutorials, data storage, help system and diagnostics —Performance monitoring e.g. production rates per job, bags-per-minute/hour, etc.
- Powered unwind for positive bag-web control ensures minimum bag movement for accurate positioning and loading and for in-line printing accuracy
- On board memory stores job data ready for recall at a later time
- AutoThread™ automatic bag threading for quick and easy set up and change over
- System handshaking via RS-232 and AutoLink™ ports which will allow for a tie-in to APS in-feeds and a wide array of third party equipment
- Simple height adjustment for added comfort
- Multiple language choice—English, French, Spanish, German, and Dutch available by making a selection on the touch screen
- Product Support Platform is also a synchronized conveyor providing efficient transition of filled bags from the load area

Modular Valve Pack

A pneumatic control system designed for productivity, reliability and fast addition or replacement of individual valves.

Modular E-Box.

Designed to increase uptime, the E-Box is decentralized for easy access to logic and control boards. For maximum uptime, the entire E-Box can be replaced in minutes.

Typical Applications

- Automotive & appliance parts
- Electrical & electronic parts
- Hardware & DIY – bulk pack
- Large plumbing and heating parts & assemblies
- Electrical wiring harnesses and assemblies
- Candy and dry goods
- Hobby & craft – bulk pack
- Instruction manuals & kits



Also available in a vertical configuration the AB 255 is ideal for automatic infeed applications. The capability to package up to 8 lbs of bulk product per bag provides solutions for multiple applications.

Options

- Trim Seal
- Seal Flatteners
- AutoTouch extension mount kit
- Adjustable Infeed Tray
- Synchronized Bag Deflator
- Range of in-feed funnels
- Spare parts kits

Technical Specifications

Weight: 390 lbs (176.9 kg)

Electrical: 110/220 VAC switchable 50/60 Hz


Air Feed: 5 CFM/80 psi of clean, dry air

Dimensions:

Pass-Through: 4.63 to 6 in. (11.76 to 15.24 cm)


Bag Thickness: 1.0 to 5.0 mil (23 – 15 microns)

Bag Sizes: W 4 to 16 in. L 5 to 26 in.

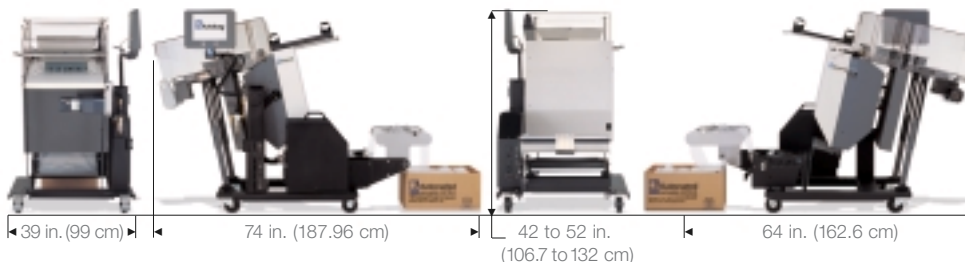

Mechanical Features


Stepper motor technology provides high-speed advancement and precise placement of the web of bags maximizing productivity.

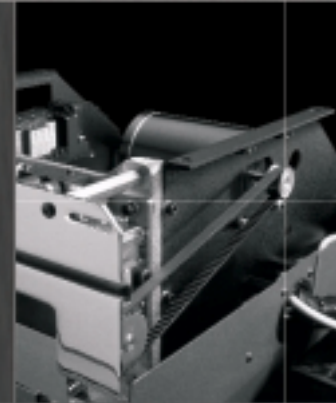

Powered Unwind, exclusive to Autobag systems, provides web alignment and tension control for consistent film delivery to product load station.



Opposing friction belt design traps the bag web to maintain a constant position for precise product loading and accurate sealing.



Automated Packaging Systems Inc.
 10175 Philipp Parkway
 Streetsboro, Ohio 44241
 Tel: 888-288-6224
 Fax: 330-342-2400

m a c h i n e s

m a t e r i a l s

s e r v i c e

s y s t e m s a d v a n t a g e